Offer 348115

MELER PS 20-NS/4 from 2017

Bookbinding Components

Offer Details

Offer Number	348115
Brand	MELER
Model	PS 20-NS/4
Manufacturer	MELER
Condition	Good
Year	2017
Incoterm	Free Carrier
Cylinders Condition	
Under Power	No
Still in production	No
Test possible	No
Complete and in working condition	Yes
Availability	immediately
Counter	
Machine number	

Description	Non-Stop + Drum melter for 20 kg PUR adhesive blocks Trolley with PUR Melting device suitable for Mueller Martini Corona Integration of melter in automated production lines for Kolbus or Mueller Martini perfect binding lines Real-time data monitoring Remote control Continuous block production of PUR, reactive polyolefin and non-reactive MELT-ON-DEMAND feature: smart melting for adhesive care NON-STOP system to avoid unwanted machine stops Leak tight design of melter assembly and cover Easy-clean opening (> 120º) Non-stick surface for easy cleaning Simple and easy to handle cover assembly Collapsible casing for performing clean-in-place Up to 6 electrical channels Wider range of gear pumps Larger variety of extra options: Integration with RTFC system and external temperature control Main tank volume Ø286 x 395 mm (20 kg blocks) Melting reservoir tank volume 3.5L (used) / 6.5L (max.) Pumping capacity (*) 1, 2.5, 4, 8 and 15 cc/rev single pump 2×0.93, 2×1.86, 2×3.71 and 2×4.8 cc/rev double pump Melting rate (*) Up to 18 kg/h Number of pumps Up to 2 single pumps or 2 double pumps Number of hydraulic output 2 per pump Number of electrical outputs 2, 4 or 6 outputs (Standard version) Motor power 0.375 kW/ 0.55kW (with 15cc/rev pump) Speed 10-80 rpm (range 0-100 rpm) Temperature range From 0ºC to 200ºC Temperature control RTD ±0,5ºC (Pt100, Ni120 or NTC) Maximum power pressure 80 bar By- pass valve Pneumatic or mechanical Maximum power supply 1 single pump/ 2 outputs > 4.5kW/ per phase 2 single pumps/ 4 outputs > 6.4kW/ per phase External functions Input Motor start/stop external signal, standby external control, activity control, on/off pumping signal, Outputs Temperatures ok output, Finished block signal, Reservoir low level signal, Standby external control input, Motor start/stop external signal, Motor speed external control Electrical requirements 3N – 400V 50/60 Hz + PE (please consult on other voltages)

Technical details

Tank capacity	Ø 286x395 (20 kg blocks)
Melting rate	20 l/h continuous consumption with no grille control
Number of Hydraulic outputs	2 per pump
Number of Electric outputs	2 or 4 outputs
Speed Motor	1ß
Temperatures range	40 to 200°C
Max. working pressure	(at 6 bar)
Adhesive	PUR

PRICE: EUR 12.000 FCA

Images

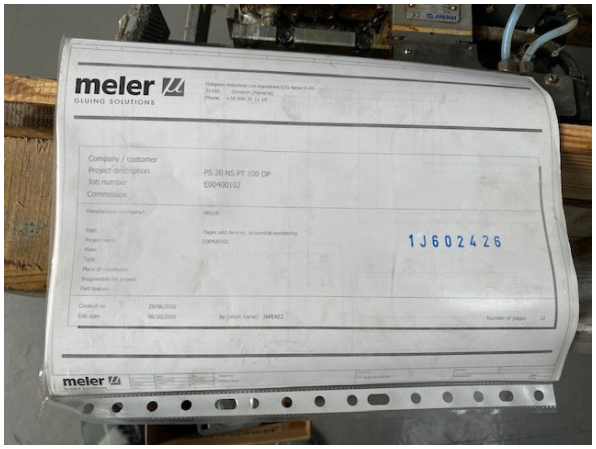

8674


meler


meler
www.meler.eu
Power supply/
Alimentación
3~ N/PE 400/230V 3~ 50/60 Hz
6,8 KW / 4,8 KW / 2,9 KW
Outputs/
Salidas
4
Date/
Fecha
251116
Reference/
Referencia
101800530 PS20-NS_4 M01 L S8 PC A1 B1 DP1
Serial No./
N°Serie
1J602426
Made in E.U.


meler




meler
GLUING SOLUTIONS
Company / customer
Project description
PS 20 NS PT 100 DP
Job number
E00400102
Commission
1J602426
meler




230v